

REC'D 27 JAN 2005

WIPO

PCT

IB/2005/050293

PA 1161843

# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**April 26, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.**


**APPLICATION NUMBER: 60/539,724 ✓**

**FILING DATE: January 28, 2004 ✓**

## **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**

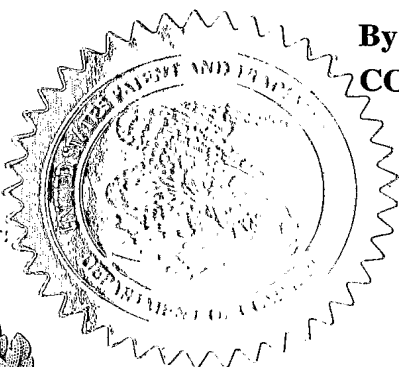

**M. K. HAWKINS**  
**Certifying Officer**

PATENT APPLICATION SERIAL NO. \_\_\_\_\_

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE  
FEE RECORD SHEET

02/02/2004 FHETEKI1 00000117 141270 60539724

01 FC:1005 160.00 DA

PTO-1556  
(5/87)

\*U.S. Government Printing Office: 2001 — 481-697/59173

22783 U.S. PTO

Please type a plus sign (+) inside this box →



PTO/SB/16 (02-01)  
Approved for use through 10/31/2002. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 312 068 374 Date of Deposit: JANUARY 28, 2004

INVENTOR(S)					
Given Name (first and middle [if any])		Family Name or Surname		Residence (City and either State or Foreign Country)	
Rani Mary Piotr Leszek		JOSEPH SAWICKI		EINDHOVEN, THE NETHERLANDS EINDHOVEN, THE NETHERLANDS	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
Automatic Audio Signal Dynamic Range Adjustment					
CORRESPONDENCE ADDRESS					
Direct all correspondence to:					
<input checked="" type="checkbox"/> Customer Number <u>24737</u> → <div style="border: 1px solid black; padding: 5px; display: inline-block;">*24737*</div>					
OR _____ Type Customer Number here					
<input type="checkbox"/> Firm or Individual Name		PHILIPS ELECTRONICS NORTH AMERICA CORPORATION			
Address		345 SCARBOROUGH ROAD			
City		BRIARCLIFF MANOR		State	NY
Country		USA		ZIP	10510
		Telephone		(914) 333-9643	Fax (914) 332-0615
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		<u>12</u>		<input type="checkbox"/> CD(s), Number _____	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		<u>1</u>		<input type="checkbox"/> Other (specify) _____	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: <u>14-1270</u> FILING FEE AMOUNT (\$) <u>160.00</u>					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

Michael E. Belk

Date

JANUARY 28, 2004

TYPED or PRINTED NAME

MICHAEL E. BELKREGISTRATION NO.: 33,357  
(if appropriate)

TELEPHONE

(914) 333-9643

Docket Number:

US040073**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

## AUTOMATIC AUDIO SIGNAL DYNAMIC RANGE ADJUSTMENT

The invention herein is related to the field of automated processing of audio signal and more specifically to the field of dynamic range compression/expansion of audio signals.

Dynamic range is the ratio of a specified maximum level of a parameter, such as power, current, voltage, or frequency to the minimum detectable level of that parameter. In the field of audio signal processing the term dynamic range usually refers to the dynamic range of the power level usually referred to as signal level. The signal level is usually measured in decibels (dB) and dynamic range is usually expressed as the difference in dBs between the maximum signal level and the minimum signal level. In this application dynamic range will refer to the difference in signal level expressed in db.

The dynamic range of human hearing, the difference between the softest sound we can perceive and the loudest we can comfortably hear, is about 120 dB. The dynamic range typically provided by vinyl records is around 55 dB. The dynamic range available for CD's is around 90 dB and the dynamic range for DVD is about 120 dB.

Compressors, expanders, and noise gates are audio signal processing devices used to alter the dynamic range. This is often done to achieve a more consistent sound when recording, or to provide a special effect to make music sound louder without increasing the maximum volume level. Compressors work by providing higher signal gain to lower level signals in order to reduce dynamic range. Compression increases the loudness of quieter portions of a performance and/or quiets the louder portions. Expanders are the opposite of compressors. Expanders make quiet portions of audio quieter

and/or loud portions louder in order to increase the dynamic range. Noise gates reduce dynamic range by truncating or cutting off lower level signals.

Analog broadcasters usually compress the dynamic range of audio because of legal limits on the maximum volume of the broadcast and the high level of noise in analog broadcasting. Receivers for analog broadcasts, commonly use a noise gate to truncate the lower portions of the dynamic range of the signal in order to reduce noise. Some analog receivers have also included expanders to expand the dynamic range of the received signal.

In digital broadcasting, compression and noise gates are not required since there are no volume limitations and transmission noise does not result in noise in the decoded audio signal. However, digital broadcasters continue to compress audio in order to maintain the same sound as analog broadcast and because many listeners are in noisy environments or are listening at a relatively low volume.

It has long been recognized that users generally want more control over various aspects of sound quality. Even some of the earliest audio equipment provided user control over volume. When stereo sound was first developed users were immediately given separate control over the volume of the left and right channels. Later audio equipment provided user control over treble and base settings and surround sound usually provides control over volume of front and back speakers.

Those skilled in the art are directed to the following citations which are hereby incorporated in whole by reference. Published US patent application US2003/0002659 A1 by Adoram Erell, published Jan 2, 2003 discloses a telephone in which the dynamic range of the sound provided by the loudspeaker of a telephone is adjusted depending on the noise

in the audio signal received from the microphone of the telephone. US published application US2001/0055400 A1 discloses dynamic range compression depending on volume setting of audio equipment in an automobile.

5       While it is known that optimal dynamic range of sound provided by a loudspeaker may depend on ambient noise or signal levels, the inventors have discovered that it is useful to control the dynamic range for a loudspeaker depending on other conditions that are at least partially  
10   independent of ambient noise level or volume settings.

      The inventors have also discovered that automatic control of dynamic range is required because the audience of a audio performance is generally not aware of the need to adjust the dynamic range. That is, while users of audio  
15   equipment prefer one dynamic range setting over another dynamic range setting, it is not obvious to the user that the dynamic range needs to be adjusted or whether it should be increased or decreased. In the invention herein the dynamic range of an audio signal is automatically adjusted, for  
20   example, depending on ambient or external conditions.

      In one aspect of the invention, a sound source receives an input audio signal and a sense signal depending on an ambient condition independent of sound. The sound source has dynamic range controller that automatically adjusts the  
25   dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on the sense signal. Then the sound source converts the output audio signal to ambient sound waves.

      The input signal may be a tuner for providing a baseband  
30   audio signal from a modulated broadcast signal from cable, satellite or antenna; a reader for providing the audio signal from a record carrier; or a local area network connection. The automatic dynamic range controller may provide continuous

adjustment, for example, proportional to the sense signal. Alternatively, the automatic dynamic range controller may provide discrete adjustments depending on predetermined levels of the sense signals, for example, an on/off  
5 adjustment depending on a threshold level.

The ambient condition independent of sound, may be for example, the time of day, the ambient light level, the location of the sound source, the acoustic properties at the location of the sound source, and when the sound waves  
10 represent music, the genre of the music.

In another aspect of the invention, a sound source receives an input audio signal and at least two sense signals. One sense signal depends on the ambient sound noise level, and the other sense signal depends on a different  
15 condition such as a sound volume setting of the sound source. The sound source has dynamic range controller that automatically adjusts the dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on both of the sense signals. Then the sound source  
20 converts the output audio signal to ambient sound waves.

Additional aspects and advantages of the invention will become readily apparent to those skilled in the art from the detailed description below with reference to the following drawings.

25 Figure 1 illustrates a specific example embodiment of the sound source invention herein.

Figure 2 illustrates a specific example embodiment of the method of the invention herein for adjusting the dynamic range of provided sound waves.

30 In figure 1, a portable sound source 100 includes a dynamic range controller 102. Such portable sound sources include AM/FM radios, CD and DVD players, television sets, vehicle audio systems, and MP3 players. The dynamic range

controller receives an audio input signal at input terminal 104 and receives sense signals at one or more sense terminals 106-108, and adjusts the dynamic range of the audio input signal depending on the sense signals to provide an audio  
5 output signal at output terminal 110. The audio output signal is directed to a loudspeaker 112 to convert the audio output signal to sound waves. The dynamic range controller may be a combination of one or more of a dynamic range compressor, a dynamic range expander, or a noise gate. Loudspeaker 112 may  
10 be any device for converting the output audio signal to sound waves. The loudspeaker may be mono, stereo, or surround sound, and may include multiple speaker types such as tweeters, horns, woofers or solid state sound devices. Input terminal 104 is connected through a switch 120 to an audio  
15 signal input. A well known example of an audio signal input includes antenna 122 and demodulator/tuner 124. The antenna may be a radio antenna for receiving terrestrial broadcasts or a satellite antenna. Well known examples of such inputs include cellular telephone systems, AM/FM radio, television  
20 broadcasts, or a wireless network. Alternatively, the input may be a memory device reader 206 such as a CD, DVD, hard disc drive, or a solid state memory cartridge interface. Also, the input may be a connection 208 to a wired network such as a connection to a CATV system, telephone system, or  
25 computer network.

Sensor inputs 106-108 receive sensor signals from sensors 210-216. The ellipses in the figure indicate that additional sensors may be provided. Herein, sensor has a very broad meaning. The sensors may be anything that detects  
30 or determines a condition such as ambient, external or internal conditions. For example, a sensor might be a clock 212 to provide the time-of-day, or multiple microphones 214 and 216 to detect ambient sound levels or a processor 210 to



determine the dynamic range of the input audio signal. Additional detectors may include ambient light sensors, location sensors such as GPS, a network detection sensor (for example, to determine when the sound source is inside an automobile), or a sensor that determines the acoustic properties of the location of the sound source. In the case of processor 210, the processor may detect the power level of the input audio signal or it may detect information in the audio signal such as the genre of music in the signal. The sensors may be communication devices which, for example, receive a code from a radio or infra-red remote control signal to identify the audience and the sensor may provide a sense signal indicating the preferences of the audience with regard to dynamic range.

In figure 2 an example 200 of the method of the invention is illustrated. In step 202 an input audio signal is received. In step 204 a sense signal is received. The sense signal may be dependent on any ambient or external condition that is independent of ambient noise or sound volume. In step 206 the dynamic range of the input audio signal is adjusted to provide an output audio signal, the adjusting depending on the sense signal. In step 208, the output audio signal is converted to sound waves, for example, by a loudspeaker.

The above description merely illustrates the present invention and should not be construed as limiting the appended claims to any particular embodiment or group of embodiments. Thus, while the present invention has been described in particular detail with reference to specific example embodiments, it should be appreciated that numerous modifications and changes may be made thereto without departing from the broader and intended spirit and scope of the invention as set forth in the following claims. The

specification and drawings are accordingly to be regarded as merely illustrative and not to limit the scope of the appended claims.

In interpreting the appended claims, it should be understood

5 that:

a) the word "comprising" does not exclude the presence of additional elements or acts than those listed in a given claim;

10 b) the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements;

c) any reference signs in the claims do not limit their scope;

d) several "means" may be represented by the same item or hardware or software implemented structure or function;

15 and

e) each of the disclosed elements may be comprised of hardware portions (e.g., discrete electronic circuitry), software portions (e.g., computer programming), or any combination thereof.

CLAIMS:

1. A sound source, comprising:
  - an input (104) for receiving an input audio signal;
  - an input (106) for receiving a sense signal depending on an ambient condition independent of sound; and
  - a dynamic range control (102) that automatically adjusts the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the sense signal; and
  - a loudspeaker (112) that converts an output audio signal to ambient sound waves.
2. The sound source of claim 1, wherein:
  - the input is selected from one or more of: a demodulator/tuner (124) for providing a baseband audio signal from a modulated broadcast signal from cable, satellite or antenna; a reader (206) for providing the audio signal from a record carrier; and a network connection (208).
3. The sound source of claim 1, wherein the dynamic range adjustment is switched between discrete predetermined levels of dynamic range adjustment depending on the sense signal.
4. The sound source of claim 3, wherein depending on the sense signal, in some cases the dynamic range of the output signal is identical to the dynamic range of the input signal and in other cases the dynamic range of the output signal is substantially less than the dynamic range of the input signal.
5. The sound source of claim 1, wherein the automatic dynamic range control provides substantially continuous

variation in the level of adjustment of the dynamic range of the output audio signal depending on substantially continuous variations in the sense signal.

6. The sound source of claim 1 wherein the sound independent ambient condition is a time of day.

7. The sound source of claim 1 wherein the sound independent ambient condition is the ambient light level.

8. The sound source of claim 1 wherein the input audio signal is music and the sound independent ambient condition is the genre of the music.

9. The sound source of claim 1 wherein the sound independent ambient condition is the location of the sound source.

10. The sound source of claim 1 wherein the sound independent ambient condition is the acoustic properties at the location of the sound source.

11. The sound source of claim 1 wherein multiple sensors provide one or more sense signals depending on multiple ambient conditions and the dynamic range control adjusts the dynamic range depending on the one or more sense signals.

12. A method, comprising:  
    receiving an input audio signal;  
    receiving a sense signal depending on an ambient condition independent of sound;

automatically adjusting the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the sense signal; and

converting the output audio signal to ambient sound waves.

13. An sound source, comprising:

an input for receiving an input audio signal;

an input for receiving a first sense signal depending on a condition, the condition being an ambient sound noise level;

an input for receiving a second sense signal depending on another different condition;

a dynamic range control that automatically adjusts the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the first and the second sense signals; and

a loudspeaker for converting the output audio signal to ambient sound waves.

14. The sound source of claim 13, wherein the other condition is related to sound.

15. The sound source of claim 13, wherein the other different condition is a volume setting of the sound source.

16. The sound source of claim 13, wherein the other different condition is the dynamic range of the input audio signal.

17. A sound source, comprising:

an input for receiving an input audio signal;

an input for receiving a sense signal depending on an external condition independent of sound; and

an dynamic range control that automatically adjusts the dynamic range of the input audio signal to provide an output audio signal, the adjusting depending on the sense signal; and

a loudspeaker that converts an output audio signal to ambient sound waves.

18. The sound source of claim 17, wherein the sound independent external condition is the identity of the audience.

19. The sound source of claim 17 wherein the sound independent external condition is distance between a loudspeaker and an audience.

20. The sound source of claim 17 wherein the sound independent external condition is the location of the sound source.

21. The sound source of claim 17 wherein the sound independent external condition is the source of the input audio signal.

ABSTRACT

A sound source receives an input audio signal and a sense signal depending on an external condition. The sound  
5 source has dynamic range controller that automatically adjusts the dynamic range of the input audio signal to provide the output audio signal, the adjusting depending on the sense signal. Then the sound source converts the output audio signal to ambient sound waves.


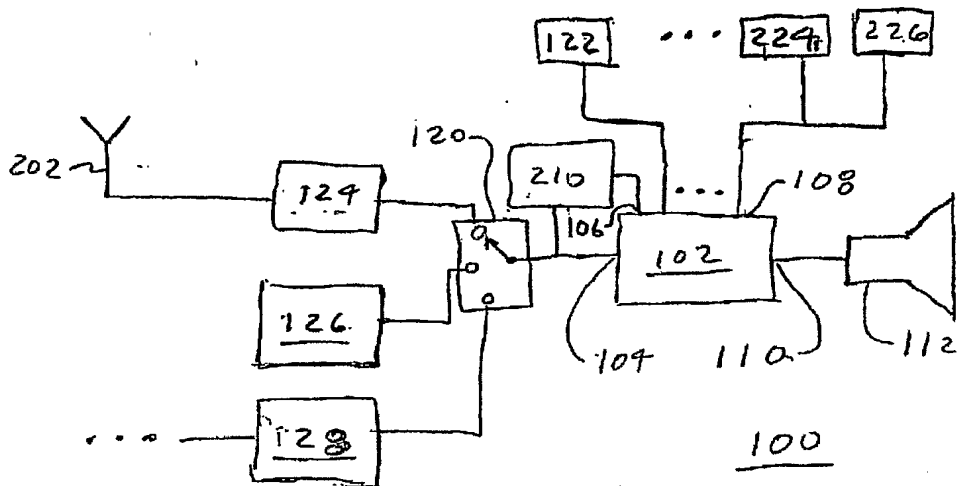


Fig. 1

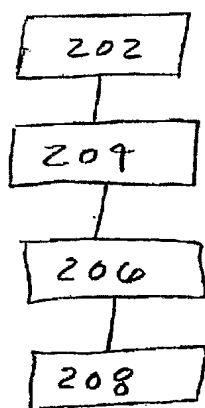

200

Fig. 2